


COMMERCIAL QUALITY FOR YOUR HOME

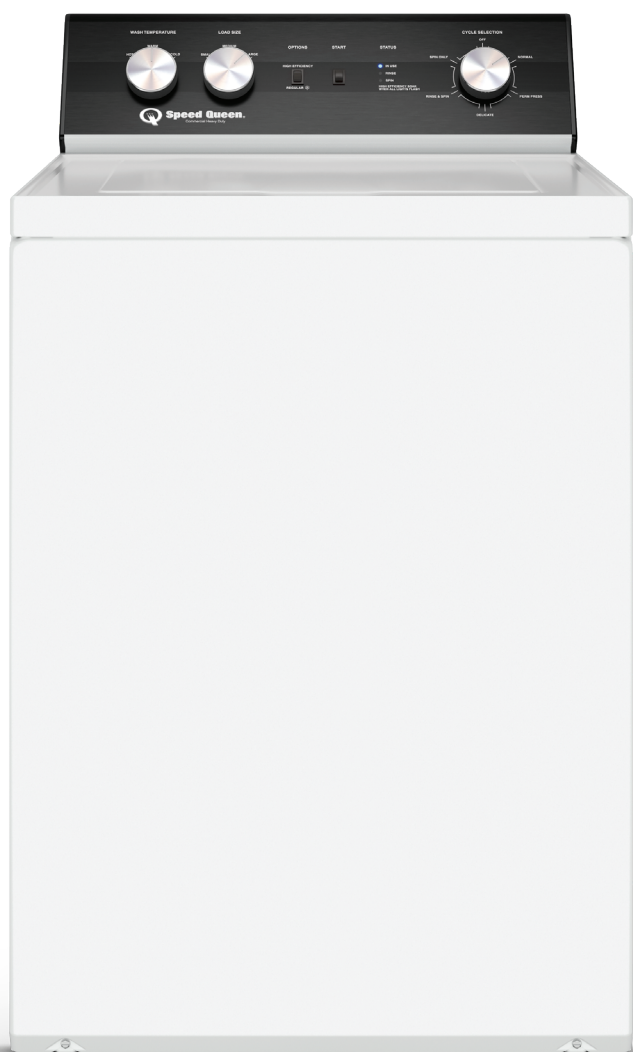

**AWNA62**  
AWNA62SN305AW01

---

## Tested to Outlast

We still make them like we used to. Tested for 10,400 cycles which could be up to 25 years in the home.

---

## Extra Capacity

Large 92 litre stainless steel tub won't corrode, chip, pit or crack. It's not only gentler on clothes, but both the inner and outer tub come with a lifetime warranty.

---

## Wash Quality

Traditional full-sized flex vane agitator with extra-large 210° agitation arc, with 68 agitations per minute, provides superior wash performance.

---

## Durable

Triple coated, commercial-grade steel cabinet will look good for years to come, whilst full metal base provides stability and noise suppression.

---

## Commercial Grade

Heavy duty, all metal transmission and industrial strength motor as used in laundrettes world wide.

---

## Fast Cycle Times



Regular cycle, normal wash - 37 minutes.

---

**SPEEDQUEENHOME.COM.AU**

<b>Model Numbers</b>	AWNA62
<b>Capacity</b>	8.5 kg
<b>Drum Capacity Litres</b>	92.3 L
<b>Dimensions (H X W X D)</b>	1092 x 651 x 711 mm
<b>Spin Speed (Rpm)</b>	710 / 473 RPM
<b>Agitation Rate</b>	68/44 per minute
<b>Motor Size Kw (Hp)</b>	0.37 (1/2)
<b>Motor Speeds</b>	2
<b>Water Consumption High Efficiency Cycle (Avg)</b>	117 L
<b>Variable Water Level Selection</b>	Yes
<b>Available Cycles</b>	Normal, Perm Press, Delicate, Rinse, Rinse & Spin, Spin only
<b>Wash Options</b>	Regular or High Efficiency

<b>Water Temperature Selection</b>	3
<b>Water Pressure Kpi (Psi)</b>	140-830 (20-120)
<b>Bleach Dispenser</b>	Yes
<b>Fabric Softener Dispenser</b>	Yes
<b>Wash Tub</b>	Stainless Steel
<b>Outer Wash Tub</b>	Porcelain Steel
<b>Cabinet</b>	Triple Coated Galvanised Steel
<b>Electrical Requirements (Voltage/Hz/Ph)</b>	240 V / 50 Hz AC / 1 Ph
<b>Fill Hoses Included</b>	Yes, 1.2 Mtrs
<b>Automatic Balancing System</b>	Yes
<b>Rear Self-Levelling Legs</b>	Yes
<b>Shipping Dimensions (H X W X D)</b>	1156 x 700 x 780 mm
<b>Shipping Weight</b>	89 kg

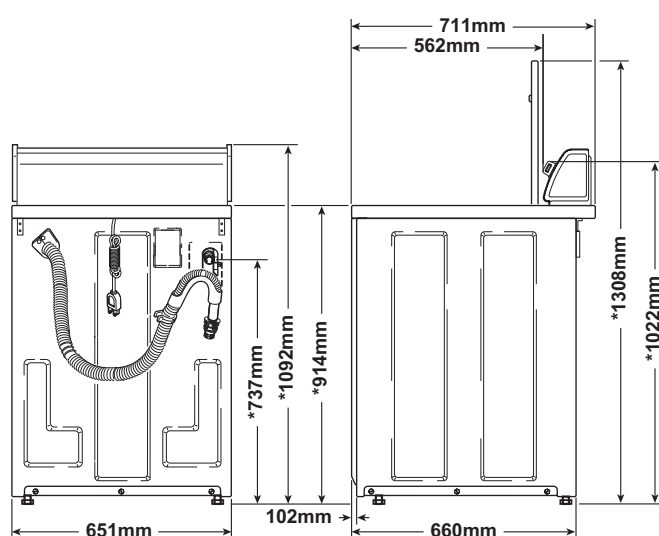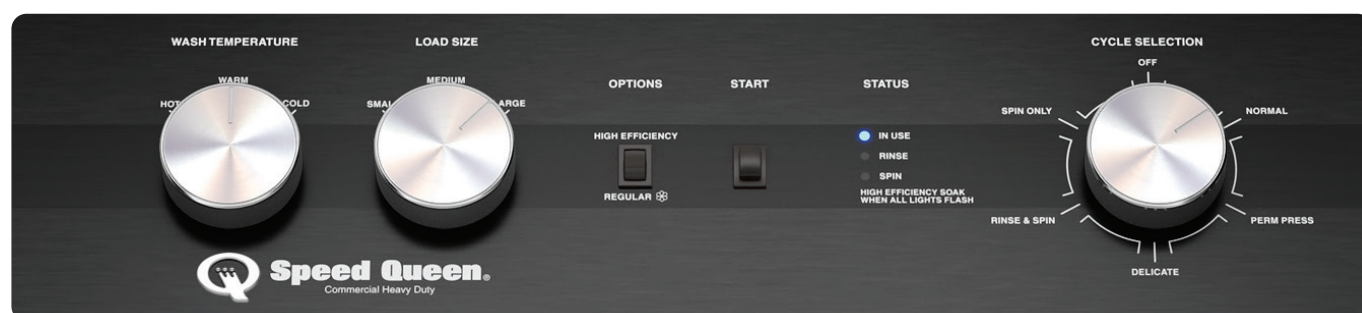

**TOP LOAD**